



Justrite Safety Group

Dry Areas - Medium duty

417 Bubble Sof-Tred™



417 BUBBLE SOF-TRED™

Dry Areas - Medium duty

417 Bubble Sof-Tred™

Lengthwise corrugated rib pattern for sure footing. Exceptional worker comfort due to 12.7 mm thick specially formulated compound. Protective layer of exclusive Dyna-Shield™ extends service life by 50% compared to regular microcellular vinyl*.

Available with yellow borders along sides comply with OSHA code 1910-144. All 4 sides are bevelled and sealed to minimize tripping hazards.

Recommended use:

- Medium duty
- Industrial
- For placement in manufacturing plants, assembly lines, picking, packing and logistics warehouses, individual work stations.

Specifications:

- Microcellular vinyl
- Backing: Vinyl (DOP free)
- Bevelled edges on all sides
- Overall thickness: 12,7 mm
- Weight: 4 kg/m²
- Slip rating: R10
- Free of DOP, free of DMF, free of ozone depleting substances, free of silicone and free of heavy metals

Standard sizes:

- 60cm x 91cm
- 91cm x 150cm

Full rolls:

- 60cm x 18.3m
- 91cm x 18.3m
- 122cm x 18.3m

Custom lengths:

- 60cm x linm
- 91cm x linm
- 122cm x linm

Colours:


- Black/Yellow, Grey

Cleaning instructions:

- Daily sweeping with a brush




PRODUCT TESTING



GOOD BETTER BEST


417 Bubble Sof-Tred™ (black/yellow)

Art. nr.	Dimensions	Weight kg
417S0023BY	60cm x 91cm	2,1
417S0035BY	91cm x 150cm	5,3
417R0024BY	60cm x 18.3m	43
417R0036BY	91cm x 18.3m	64
417R0048BY	122cm x 18.3m	86
417C0024BY	60cm x linm	2,3
417C0036BY	91cm x linm	3,5
417C0048BY	122cm x linm	4,7

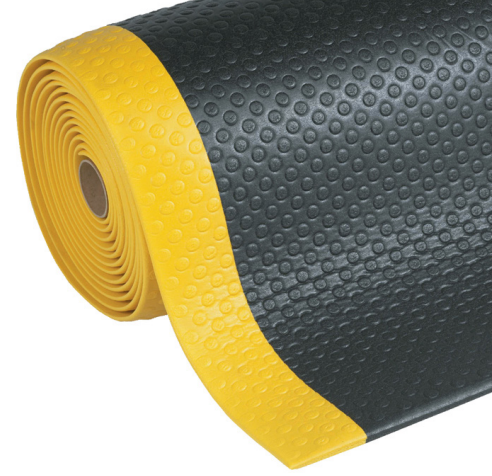

417 Bubble Sof-Tred™ (grey)

Art. nr.	Dimensions	Weight kg
417S0023GY	60cm x 91cm	2,1
417S0035GY	91cm x 150cm	5,3
417R0024GY	60cm x 18.3m	43
417R0036GY	91cm x 18.3m	64
417R0048GY	122cm x 18.3m	86
417C0024GY	60cm x linm	2,3
417C0036GY	91cm x linm	3,5
417C0048GY	122cm x linm	4,7

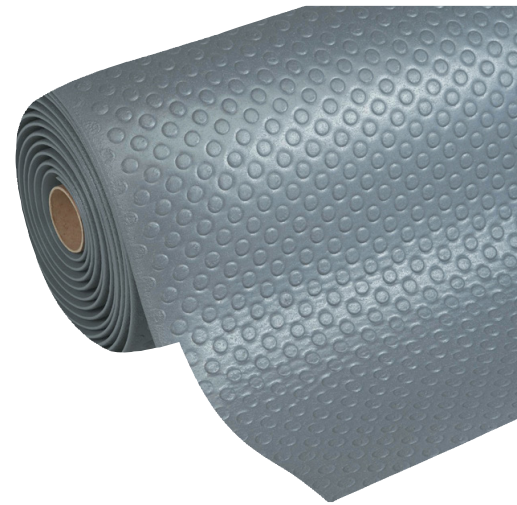

417 Bubble Sof-Tred™

GENERAL DESCRIPTION

Type	Dry Areas - Dyna Shield™
Description	12.7 mm thick specially formulated compound with unique bubble design. Protective layer of exclusive Dyna-Shield™ extends service life.
Recommended use	Dry Areas
Surface	Ergonomic bubble
Category	Ergonomic, Anti-fatigue Safety Matting Medium duty
Colours	Black/Yellow, Grey
Edges	Bevelled edges on all sides

TECHNICAL SPECIFICATIONS

Material	Microcellular vinyl
Backing	Vinyl (DOP free)
Process	Foaming
Total weight	4 kg/m ²
Overall thickness	12,7 mm

TESTS

Compression deflection	U.S.	0.70 cm 0.81 cm
Slip rating	DIN 51130	R10
Foam battery	ASTM D3574	40 lb/in ²
Abrasion resistance	ASTM D3884-01	1.7% 0.6%
Coefficient friction	ASTM C1028-96	1.10
Elongation	ASTM D412	140.8%
Breaking load	ASTM D412	24.4 lb
Tear Strength	ASTM D1004	13 lb
Hardness	ASTM D2240-02	20 Shore A
Surface flammability	ASTM D2859	Pass

DIMENSIONS

Standard sizes	Full rolls	Custom lengths
60cm x 91cm	60cm x 18.3m	60cm x linm
91cm x 150cm	91cm x 18.3m	91cm x linm
	122cm x 18.3m	122cm x linm