




Justrite Safety Group

Wet Areas - Hygienic Mats

536 Akwadek™

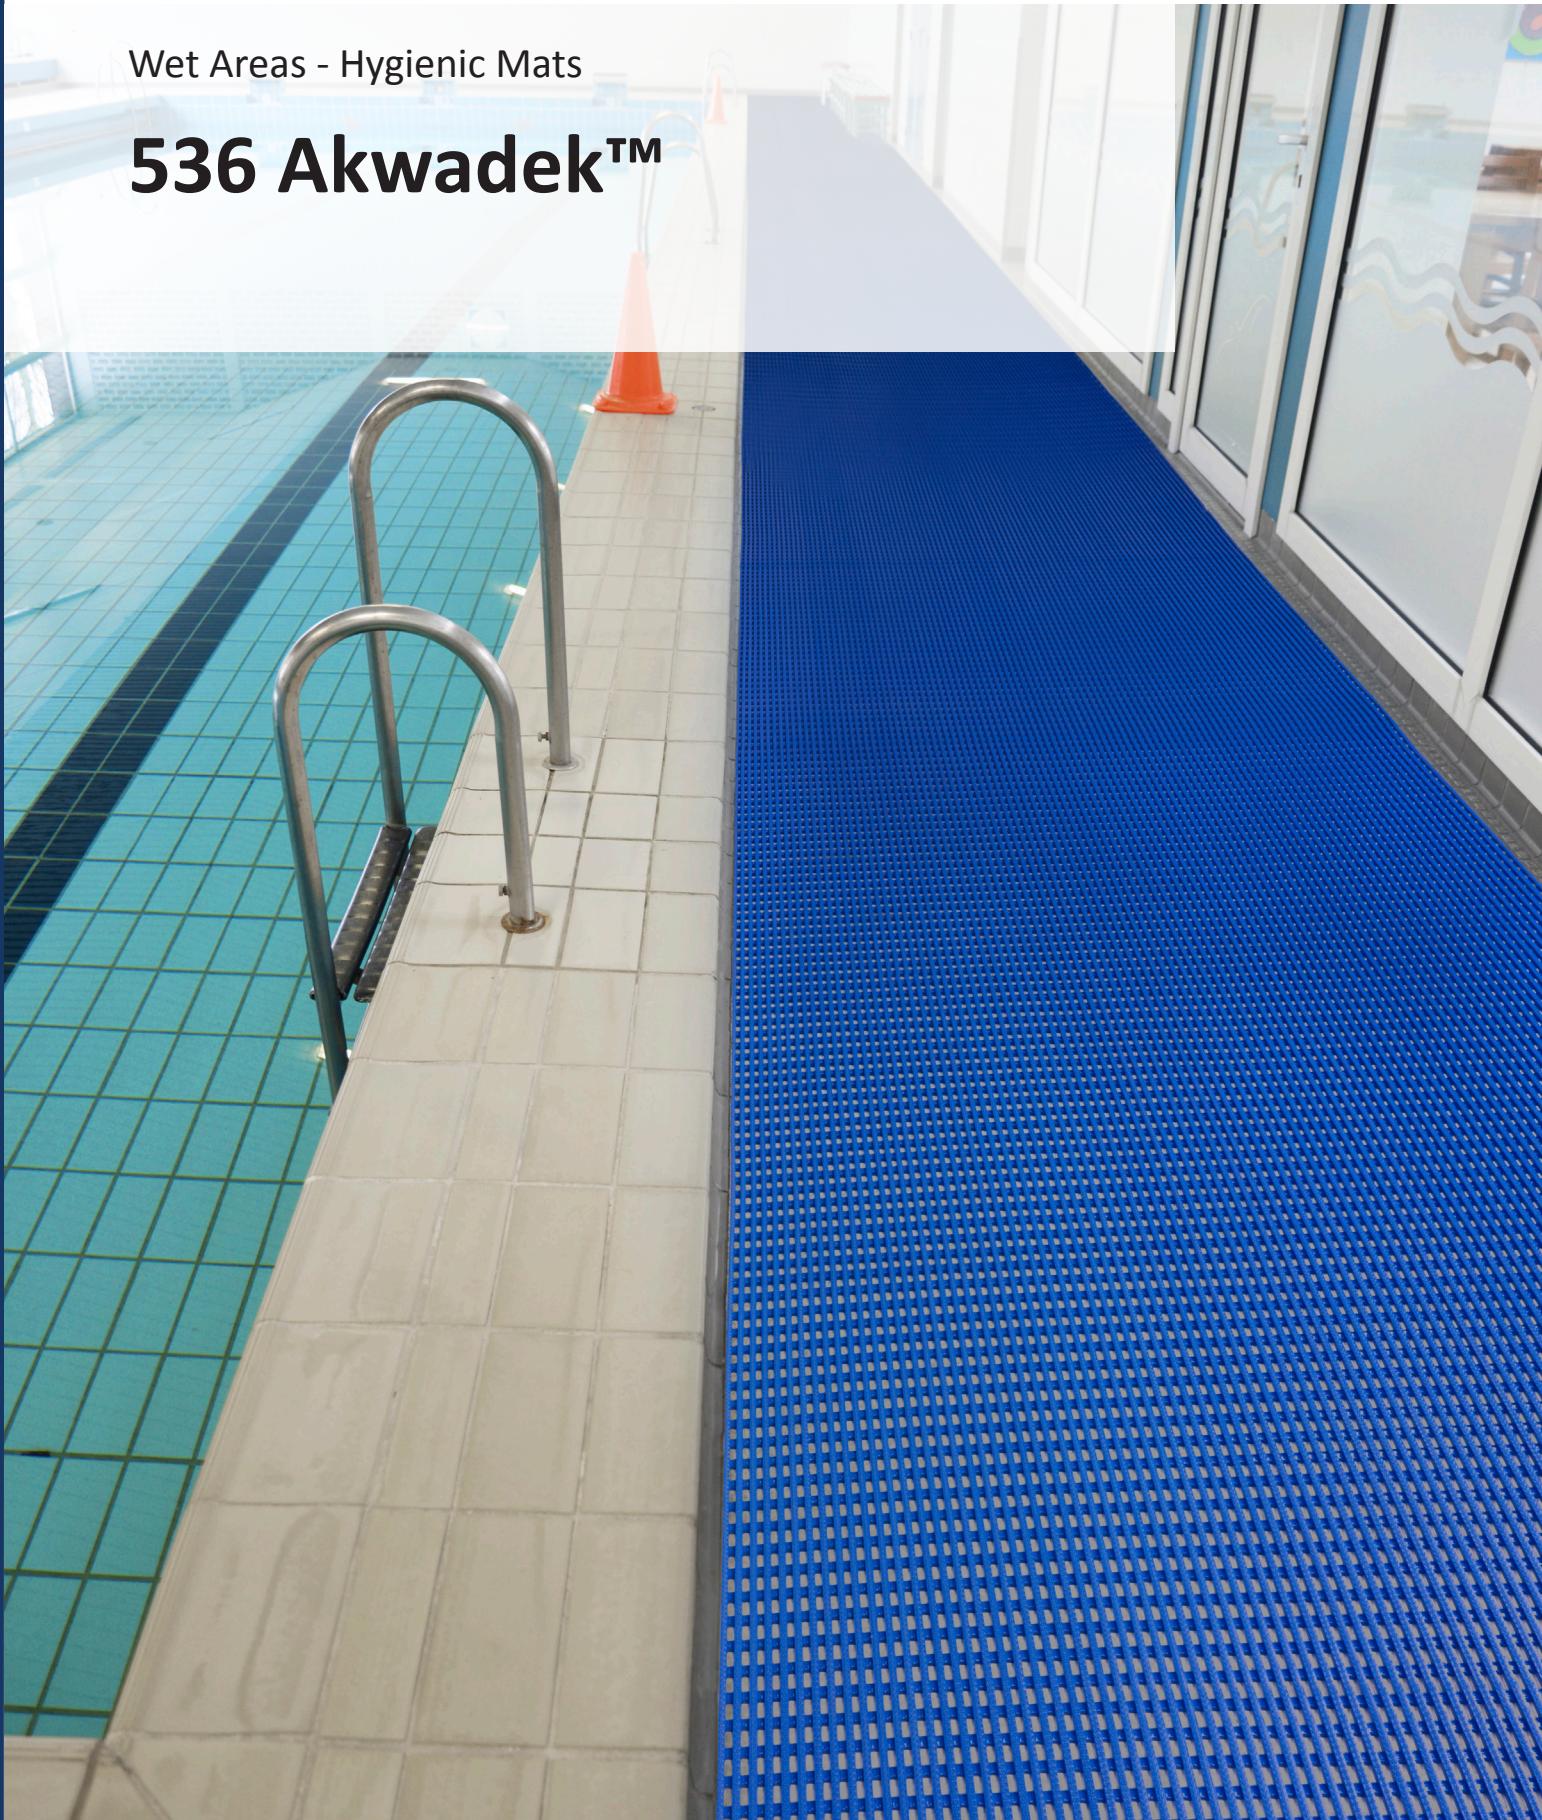

536 AKWADEK™

Wet Areas - Heavy duty

536 Akwadek™

Durable hygienic matting creates a healthier and safer environment in wet areas such as shower facilities. The grip design creates a slip-resistant yet comfortable walking surface for bare feet.

Anti-microbial treated materials prevents growth of fungi or bacteria and promotes hygiene in wet areas such as locker rooms, public swimming pools, commercial saunas, and shower facilities.

Open structure for easy draining of water, soap, shampoo and lotions where dependable sure footing is essential. Easy to clean and requires only minimal maintenance.

Recommended use:

- Heavy duty
- Hygienic anti-slip matting for placement in wet areas

Specifications:

- Antibacterial PVC
- No borders
- Overall thickness: 12 mm
- Weight: 7,5 kg/m²
- Free of DOP, free of DMF, free of ozone depleting substances, free of silicone and free of heavy metals

Recommended accessories:

- 536K Akwadek™ Flexdek™ Connectors

Full rolls:

- 60cm x 10m
- 91cm x 10m
- 122cm x 10m

Custom lengths:

- 60cm x linm
- 91cm x linm
- 122cm x linm

Colours:

- Blue, Grey

Cleaning instructions:

- Hose off with water




PRODUCT TESTING



536 Akwadek™ (blue)

Art. nr.	Dimensions	Weight kg
536R0024BU	60cm x 10m	40,5
536R0036BU	91cm x 10m	61
536R0048BU	122cm x 10m	81
536C0024BU	60cm x linm	4,05
536C0036BU	91cm x linm	6,1
536C0048BU	122cm x linm	8,1

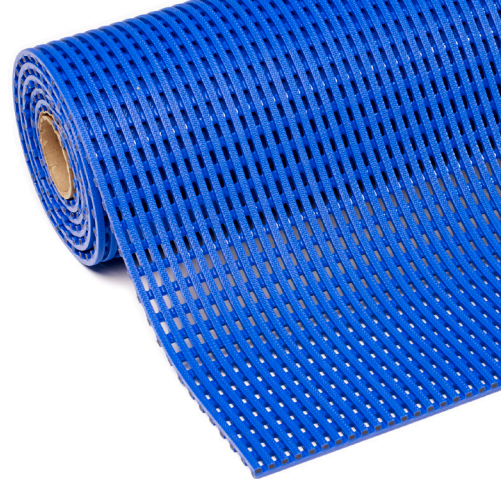

536 Akwadek™ (grey)

Art. nr.	Dimensions	Weight kg
536R0024GY	60cm x 10m	40,5
536R0036GY	91cm x 10m	61
536R0048GY	122cm x 10m	81
536C0024GY	60cm x linm	4,05
536C0036GY	91cm x linm	6,1
536C0048GY	122cm x linm	8,1



536 Akwadek™

GENERAL DESCRIPTION

Type	Wet Areas - Hygienic Mats
Description	Anti-slip grid mat.
Recommended use	Wet Areas
Surface	Welded duckboard
Category	Ergonomic, Anti-fatigue Safety Matting Heavy duty
Colours	Blue, Grey
Edges	No borders

TECHNICAL SPECIFICATIONS

Material	Antibacterial PVC
Process	Extrusion
Total weight	7,5 kg/m ²
Overall thickness	12 mm

TESTS

Sustainability	Recyclable material
Abrasion resistance	ASTM D3884-01 0.058
Coefficient friction	ASTM C1028-96 1.42
Hardness	ASTM D2240-02 82 Shore A
Surface flammability	ASTM D2859 Pass

DIMENSIONS

Standard sizes	Full rolls	Custom lengths
	60cm x 10m	60cm x linm
	91cm x 10m	91cm x linm
	122cm x 10m	122cm x linm