



Justrite Safety Group

Wet/Dry Areas - Medium duty

# 562 Sanitop™



562 SANITOP™

Wet/Dry Areas - Medium duty

# 562 Sanitop™

Provides basic comfort and traction in wet areas with large drainage holes and raised studs for aeration and to allow fluids and debris to fall through, leaving the surface clear. Moulded bevelled edges on all 4 sides to prevent tripping and allow cart access.

Rubber duckboards provide a comfortable and safe working platform in wet areas with its aggressive slip-resistant surface. Large holes and raised studs allow fluids in wet areas or debris in dry areas to fall through leaving the surface clear. Cleaning with detergent and water-jet is recommended for extended service life.

#### Recommended use:

- Medium duty
- Industrial Environments
- For placement in manufacturing plants, assembly lines, picking, packing and logistics warehouses, individual work stations.

#### Specifications:

- Natural rubber
- Moulded bevelled edges on all sides
- Overall thickness: 12,7 mm
- Weight: 8 kg/m<sup>2</sup>
- Free of DOP, free of DMF, free of ozone depleting substances, free of silicone and free of heavy metals

#### Standard sizes:

- 91cm x 152cm
- 91cm x 297cm
- 91cm x 594cm

#### Colours:


- Black

#### Cleaning instructions:

- Hose off with water




#### PRODUCT TESTING



GOOD BETTER BEST

## 562 Sanitop™ (black)

Art. nr.	Dimensions	Weight kg
562S0035BL	91cm x 152cm	11
562S0310BL	91cm x 297cm	22
562S0320BL	91cm x 594cm	44

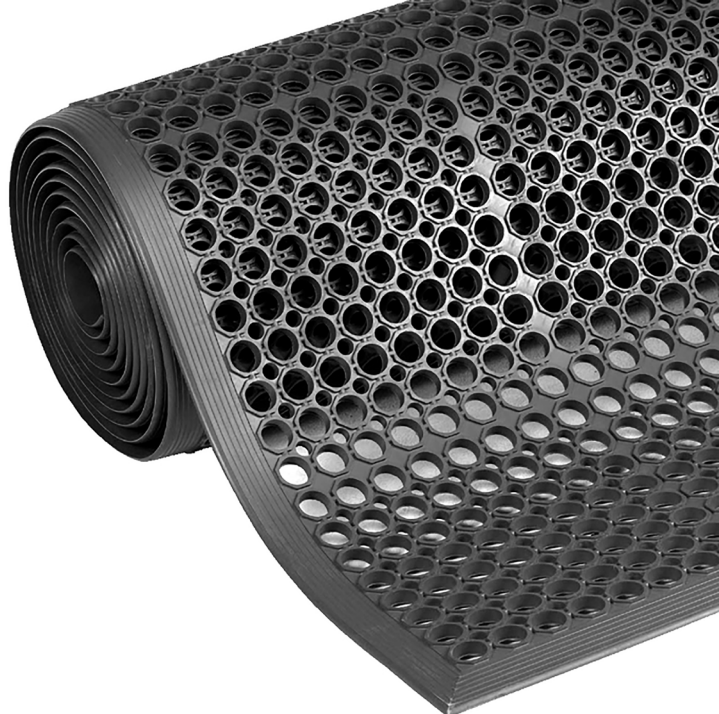

# 562 Sanitop™

## GENERAL DESCRIPTION

Type	Wet/ Dry Areas - Rubber Working Platforms
Description	Provides basic comfort and traction in wet areas with large drainage holes and raised studs for aeration and to allow fluids and debris to fall through.
Recommended use	Wet/Dry Areas
Category	Ergonomic, Anti-fatigue Safety Matting Medium duty
Colours	Black, Black
Edges	Moulded bevelled edges on all sides

## TECHNICAL SPECIFICATIONS

Material	Natural rubber
Process	Compression Moulding
Total weight	8 kg/m <sup>2</sup>
Overall thickness	12,7 mm

## TESTS

Sustainability	Recyclable material
Abrasion resistance	ASTM D3884-01 6% weight loss
Coefficient friction	ASTM C1028-96 0.59
Elongation	ASTM D412 227.7%
Breaking load	ASTM D412 37.5 lb
Hardness	ASTM D2240-02 52 Shore A
Surface flammability	ASTM D2859 Pass

## DIMENSIONS

Standard sizes	Full rolls	Custom lengths
91cm x 152cm		
91cm x 297cm		
91cm x 594cm		